


Costs, Emissions Reductions and Vehicle Repair: Evidence from Arizona

Amy Ando, Virginia McConnell,
and Winston Harrington

Discussion Paper 99-23

February 1999



RESOURCES
FOR THE FUTURE

1616 P Street, NW
Washington, DC 20036
Telephone 202-328-5000
Fax 202-939-3460
Internet: <http://www.rff.org>

© 1999 Resources for the Future. All rights reserved.
No portion of this paper may be reproduced without
permission of the authors.

Discussion papers are research materials circulated by their
authors for purposes of information and discussion. They
have not undergone formal peer review or the editorial
treatment accorded RFF books and other publications.

Costs, Emissions Reductions and Vehicle Repair: Evidence from Arizona

Amy Ando, Virginia McConnell, and Winston Harrington

Abstract

The Arizona I/M program provides one of the first opportunities to examine the costs and effectiveness of vehicle emission repair. This paper examines various aspects of emission-reductions, fuel economy improvements and costs of repair, drawing data from over 80,000 vehicles failing the I/M test in Arizona between 1995 and the first half of 1996. We summarize the wealth of data on repair from the Arizona program, and highlight their limitations. Because missing or incomplete cost information has been a serious shortcoming for evaluation of I/M programs, we develop a method for estimating the costs of repair when those costs are not reported. We find surprising evidence that almost one quarter of all vehicles that take the I/M test never pass it, and using a statistical analysis provide some information about the differences between the vehicles that pass and those that do not. Finally, we examine the potential for more cost-effective repair, first through an analysis of tightening I/M cutpoints and then by a simulation that allows estimation of the cost savings if only the cost effective repairs are made.

Key Words: I/M, repair, emissions, mobile sources

JEL Classification Numbers: Q25, R48

Acknowledgments

We would like to thank the Office of Mobile Sources of the Environmental Protection Agency for providing the data for this analysis, and employees at both Sierra Research and Arizona's Department of Environmental Quality for assistance in understanding the Arizona program and the data. Discussions with staff members at the EPA and with Robert Slott and Tom Wenzel have also been very valuable. Matt Cannon has provided excellent research support throughout the project.

Table of Contents

I.	Introduction	1
II.	The Arizona I/M Program and the Data	2
III.	Costs and Emission Reductions from Repair under Current Program	6
	A. Costs and Reductions of Emissions from the Arizona Program	6
	B. Characteristics of Successfully Repaired Vehicles	11
	C. Emission Reduction and Cost under Different Cutpoints	12
	D. Cost-effective Repair	14
IV.	Conclusions	17
	Appendix A: Average Costs by Round of Repair	19
	Appendix B: Arizona Inspection and Maintenance Program Cutpoints	20
	Bibliography	21

List of Tables and Figures

Table 1.	Failure Rates of Vehicles by Model Year	4
Table 2.	Combinations of Pollutants Initially Failed by Vehicles	5
Table 3.	Changes in Emission-Rate Reductions and Fuel-Economy Improvements	5
Table 4.	Correlation Coefficients Among Emission-Rate Reductions and Fuel-Economy Improvements	6
Table 5.	Cost Imputation Equation	8
Table 6.	Average Repair Costs, Fuel Economy Costs, and Emission Reductions for Vehicles Repaired in the Arizona Program 1995-96	10
Table 7.	Results from Probit Analysis of Successful Repair	12
Table 8.	Emission-Rate Cutpoints and Initial-Test Failure Rates for Passenger Cars in Arizona I/M, Model Years 1990 and 1991	13
Table 9.	How More Stringent Standards Affect Costs and Emission Reductions	14
Table 10.	Summary Statistics on Repair Costs	15
Table 11.	Costs, Pollution Reduction, and Cost-effectiveness of Repair by Vehicle Type ..	15
Figure 1.	Cost-effective Emission Reduction from Repair	16

COSTS, EMISSIONS REDUCTIONS AND VEHICLE REPAIR: EVIDENCE FROM ARIZONA

Amy Ando, Virginia McConnell, and Winston Harrington*

I. INTRODUCTION

Since the early 1980s, air quality management authorities in the U.S. have struggled to develop effective and politically acceptable inspection and maintenance (I/M) programs to control emissions from motor vehicles. In the 1990 Amendments to the Clean Air Act, Congress directed the EPA to develop an "Enhanced I/M" program to deal with the perceived inadequacies of existing state and local programs. The focus of these efforts was concentrated far more on the "inspection" than on the "maintenance"--identifying vehicles in need of emission repair, that is, rather than on the repair itself.

The EPA's research on repair has been limited to a small sample of vehicles, repaired in its laboratories by specially trained mechanics. These repairs brought most of the vehicles into compliance; the Agency simply presumed that further repair would do the same for the remaining failing cars. On the basis of its studies, the Agency concluded that nearly all vehicles could be successfully repaired at modest cost (USEPA 1992; Harrington et al., 1998). However, the Agency's conclusions were called into question shortly thereafter by a handful of studies of repairs done at actual auto repair shops. These studies suggested that repair was quite costly and often was unable to return vehicles to compliance (California IM Review Committee, 1994; Cebula, 1994; Lodder and Livo, 1994). These studies as well, however, were based on data sets that were small or selected by unknown, and possibly undesirable, criteria.

In this paper we use a data set that circumvents many of the problems encountered by earlier repair studies. These data are from the Arizona I/M program, the first of the new Enhanced I/M programs to be implemented. For approximately 80,000 vehicles that failed the initial I/M test during 1995 and early 1996, we have emission test results before and after repair. We also have information on the parts that were repaired, and the costs of repair.

We use these data to examine various aspects of repair under the Arizona I/M program. We explore test-failure rates by model year and, for failed vehicles, identify the vehicle characteristics that are associated with successful repair. We quantify the relationships among pollutants in test results and in post-repair emission-rate changes. We devise a method of compensating for missing cost data. Using the resulting figures, we estimate per-vehicle repair costs and improvements in emission rates and fuel economy, and assess the sensitivity of those costs and improvements to a relaxation of program cutpoints. Finally, we illustrate the scope and importance of variation in the cost-effectiveness of vehicle repair.

* Amy Ando, Fellow, and Virginia McConnell and Winston Harrington, Senior Fellows, Quality of the Environment Division, Resources for the Future.

II. THE ARIZONA I/M PROGRAM AND THE DATA

The data for this analysis are from the Arizona I/M program, which has had a biennial centralized enhanced vehicle emission inspection program in place since 1995. The program requires all vehicles from model years later than 1980 to take the newly-developed IM240 emissions test. This test measures pollutant levels for HC, CO and NOx in grams/mile over a driving cycle that reflects urban commuter travel. A vehicle fails the test if any of its emission rates exceeds the emission "cutpoint" for that pollutant, or if someone has tampered with the emission-control equipment.

A failed vehicle cannot be registered until it is repaired to meet the cutpoints. Each time a vehicle comes back for a retest, its owner must submit a repair summary which shows, for that round of repair, the changes that were made to the vehicle and the costs of those repairs. In some cases, a vehicle requiring repair expenditures over \$450 may get a waiver from the state exempting it from further repairs regardless of test outcome. However, any problems caused by tampering must be fixed.

Our dataset consists of all vehicle tests and repairs for the 17-month period from January 1995 through May 1996. We work with a very large sample of 82,786 vehicles¹ that failed the tests over this period. Some vehicles were retested and (presumably) repaired more than once, giving 110,584 rounds of repair. This data set is a rich source of information on how I/M works in the real world. However, it has a number of important complicating features.

First, although all vehicles are supposed to be repaired to meet the cutpoints, we find that about 22 percent of vehicles that fail their initial tests have passing emission rates as of their last tests. This could happen for several reasons. A number of vehicles were simply still trying to comply with the cutpoints when our sample period ended. Some may have received waivers (although the number of waivers reported by the Arizona Department of Environmental Quality in 1997 was only 4 percent of failed vehicles)² and others may have been scrapped or sold outside of the region covered by the I/M program. Still other vehicles may be improperly registered or registered outside the region but still driven in it, an outcome especially problematic for the I/M program. It is difficult to make an accurate assessment of the success of the I/M program without being able to identify the ultimate fate of all the tested vehicles.

Second, the raw emissions data reported by the Arizona program are not consistent across tested vehicles. Like many states, Arizona's test protocol allows for vehicles to "fast-pass" in less than the full 240 seconds of the test. In addition, Arizona is the only state that

¹ There were initially 135,734 failing vehicles out of a total of 995,904 tested vehicles during the entire 17 month period. We cleaned the data extensively, dropping vehicles that were plagued by any of a number of random data problems. For example, some had bogus license numbers, or multiple "initial tests." We also dropped failing vehicles which had no retests at all because we had no repair information for them.

² Personal communication, Rick Day, Arizona Department of Environmental Quality, April 1, 1998. We have not yet received data from Arizona enabling us to identify the vehicles in our sample that received waivers.

permits vehicles to fast-fail. Vehicles can fast-pass the test starting at second 31, and they can fast-fail any time after second 93. The resulting emission-test results (in grams/mile) cannot be directly compared. To make the results consistent across vehicles, we have forecast full 240-second readings from the fast-pass or fast-fail results for each vehicle.³

Third, the information on vehicle repairs, including cost and parts repaired, are self-reported by motorists and not verified by test inspectors. Furthermore, many rounds of repair have reported costs equal to zero. While zero or trivial costs can occur, there are other explanations, including warranty repair or home repairs by do-it-yourself mechanics. Reported zeroes could also indicate missing data. We can not determine which of these explanations pertains to any given car. For analysis of repair, the proper treatment of zero costs depends on what question is being asked. The cost of a round of repair would be zero from the perspective of a vehicle owner if the vehicle is still under warranty. It might also be zero if the repair were done at home, depending on the opportunity cost of the owner's time and the utility received from successful repair. However, in order to determine the full costs of repair, we want to know the costs of all the repairs that were done, regardless of who performed and paid for them. To that end, we develop a method for imputing costs for repairs with zero reported costs but non-zero numbers of reported repairs. We discuss that method and the results that emerge from its use in the next section of this paper.

Motor-vehicle repair may yield benefits through improved fuel economy. In its regulatory impact analysis (RIA) for the Enhanced I/M rule, for example, EPA estimated that fuel economy for failed vehicles would improve on average by 12.6 percent (USEPA, 1992). Using the same method as EPA, we calculate the fuel economy changes among failed vehicles in Arizona,⁴ where we found estimated fuel economy improvements to be much smaller than EPA's estimates--about 3.5 percent.

Tables 1 through 4 provide some summary information about the Arizona repair data. Table 1 shows failure rates for vehicles by model year. The probability that a vehicle of a given model year will fail the initial test increases monotonically with vehicle age except between 1990 and 1991 model years. The failure rate is actually lower for 1990 vehicles than for the newer 1991 model year because the cutpoint to which light duty cars were subject for

³ Using the 2 percent random sample of vehicles in Arizona that have full 240 second tests, we estimated a separate equation for each pollutant for each second of the test, which we then used to forecast the full 240 second reading. For a detailed discussion of the methods used and the resulting equations, see Ando, Harrington and McConnell (1998).

⁴ We use a carbon mass-balance equation supplied by EPA to estimate mpg. Our forecasted 240-second readings of HC, CO, and CO₂ emission rates are the inputs used. The equation is: $mpg = 2421 / ((.866 * HC_{gram/mile}) + (.429 * CO_{gram/mile}) + (.273 * CO_2_{gram/mile}))$. We get a small number of unreasonable outliers when we use this method to estimate fuel economy. EPA staff explained to us that these very high estimates of fuel economy may be the product of measurement errors for CO₂. CO₂ levels are only read in I/M programs to determine whether there are leaks in the exhaust pipes or if the exhaust funnel has been attached incorrectly, so these readings may be less accurate than those of the emission rates of the other pollutants. Thus, we discard vehicles with fuel economy estimates above the 99th percentile for their vehicle type (car, small light trucks, medium light trucks). The mean initial fuel economy for the remaining vehicles is 20.5 mpg.

the 1990 model year was less stringent than for the 1991 model year. Failure rates are low for new vehicles, and reach about 20 percent for vehicles 10 years old, and 40 percent for vehicles 15 years old. Table 1 also shows the percentage of failed vehicles in each model year that were not repaired to meet the cutpoints as of the last test results in the data set. As vehicles get older, this percentage also gets larger. This is evidence these vehicles are not simply still mired in the repair-and-retest process; if what we were observing were only incomplete testing sequences, then there would be little difference among model years. We return to this point in a more formal selection model below.

Table 1. Failure Rates of Vehicles by Model Year

Model Year	Percent of all vehicles that fail initial test	Percent of failed vehicles that do not later pass ^a
1981	45.43	43.7
1982	41.21	38.07
1983	38.51	38.86
1984	35.91	37.24
1985	28.78	32.77
1986	19.78	27.64
1987	14.24	25.12
1988	12.19	22.92
1989	8.11	18.47
1990	5.55	15.83
1991	6.82	18.62
1992	4.43	13.07
1993	2.58	8.14
1994	1.19	1.84
1995	0.96	1.05

^a More precisely, this is the percent of failed vehicles that do not pass the test during the time period captured by our sample.

Failures can occur for many reasons, ranging from faulty spark plugs to broken catalyts. Vehicle emission rates for the three pollutants will vary with the emission-control component that is broken. Table 2 shows the distribution of failures among all possible combinations of the pollutants. The largest number of failures were of NOx emissions only.⁵ The "none" category refers to vehicles that did not have tailpipe emission rates in excess of any of the cutpoints but still failed the test. This category represents a large share of the total failures--about 20 percent. The most common repair reported for these vehicles was replacement of a missing gas cap (a repair that is considered to be a repair for tampering),

⁵ This may be because Arizona has had an I/M program for a number of years before the current IM240, in which tailpipe HC and CO emissions were measured. Presumably, if that program were successful it would have reduced HC and CO across the fleet.

although many other repairs are also reported for this group. For the purposes of this paper, we assume that all of these vehicles fail because of tampering. However, we note that this share of tampered vehicles appears high relative to other indications of tampering on the Arizona repair form and to what the EPA reports to find in other state programs.

Table 2. Combinations of Pollutants Initially Failed by Vehicles

Combination of Pollutants	% of Initial Failures
None	19.92
HC only	16.09
CO only	6.24
NOx only	33.75
HC and CO	16.27
CO and NOx	.27
HC and NOx	6.34
HC, CO, and NOx	1.11
Total	100.00

Table 3 summarizes the improvements we observe in emission rates and fuel economy as a result of program-induced repair. The changes in pollution rates are calculated as the initial readings minus the results given by the last observed test; the change in fuel economy is the final minus the initial result. The table shows that emission rates fall on average, but there are some vehicles that have increased measured emission rates after repair, and those increases are sometimes large. Similarly, while fuel economy improves on average with repair, it may decline for some vehicles.⁶

Table 3. Emission-Rate Reductions and Fuel-Economy Improvements

Test Result Change	Mean	Standard Deviation	Min	Max
Δ HC (g/m)	.82	1.62	-11.07	13.25
Δ CO (g/m)	12.35	32.56	-259.30	327.27
Δ NOx (g/m)	.92	1.85	-12.58	16.51
Δ MPG	.76	2.73	-21.86	24.70

Note: N = 82,786.

⁶ With only a single emission measurement before and after repair, it is impossible to disentangle the fuel economy improvement from the emission test measurement error for an individual vehicle. The average improvement for all vehicles is estimated with considerable precision, however.

Table 4 highlights the interrelationships among the pollutants and between the pollutants and fuel economy. Changes in HC and CO are positively related and both are inversely related to changes in NOx emissions. Improvements in HC and CO appear to be correlated with improved MPG, but improvements in NOx emissions and MPG are barely correlated. The correlations suggest that a policy instrument aimed only at one pollutant could induce changes in emission rates of the others. This feature of auto repair complicates optimal-policy design.

Table 4. Correlation Coefficients Among Emission-Rate Reductions and Fuel-Economy Improvements

	$\Delta\text{HC (g/m)}$	$\Delta\text{CO (g/m)}$	$\Delta\text{NOx (g/m)}$	ΔMPG
$\Delta\text{HC (g/m)}$	1.0			
$\Delta\text{CO (g/m)}$	0.63	1.0		
$\Delta\text{NOx (g/m)}$	-0.16	-0.37	1.0	
ΔMPG	0.28	0.40	-0.04	1.0

III. COSTS AND EMISSION REDUCTIONS FROM REPAIR UNDER CURRENT PROGRAM

There is a great deal of controversy over the size of the emission reductions and vehicle-repair expenditures generated by current I/M programs. Here, we examine the evidence from the Arizona program regarding both of these. First, we present statistics on emission reductions and costs of repair, both with and without imputed values for repairs that are reported to be free. Next, we explore the likelihood that the vehicles we observe being repaired to meet the cutpoints are not a representative sample of all vehicles that take the initial IM240 test, and discuss the implications of that sample selection. Finally, we use the data to explore the likely effects on both repair costs and emission reductions of changing the cutpoints that some vehicles are required to meet.

A. Costs and Reductions of Emissions from the Arizona Program

Vehicle-repair costs are not the full costs of the I/M program. Indeed, repair costs have been estimated to be only about one third of the overall costs of an I/M program.⁷ However, the numbers involved are not trivial. In January 1996 alone, even a crude glance reveals repair expenditures totaling almost \$600,000. This facet of the program is big enough to warrant a more detailed analysis.

As discussed earlier, the repair and cost data reported by motorists to the Arizona I/M program are incomplete in a number of ways. For many observations, vehicles appearing for

⁷ Repair costs in Arizona are about 29 percent of the total I/M cost or about 36 percent of the cost not counting estimated fuel economy benefits. For more information see Harrington, McConnell and Ando (1999).

retests report zero costs (59 percent) or no repairs (29 percent). A large fraction (31 percent) report specific repairs performed but no expenditures.⁸ It seems likely that repairs on vehicles still under warranty or performed at home could involve no out-of-pocket expenditures, and yet still entail implicit costs such as the value of time or other resources that should be counted when evaluating the I/M program. Thus, we develop a method to estimate or impute costs for the rounds of repair that have some repairs but no costs reported.

Cost imputation is done using coefficients from an ordinary least squares regression equation. The equation is estimated using a sample of all the rounds of repair for which cost information was not missing. In this equation, cost is a function of the parts repaired (there were 26 possible types of parts), features of the repair (which round it is, how many parts were fixed, and whether the repair can be identified as having been performed in a shop), and vehicle age.

The estimated coefficients (and corresponding standard errors) of the cost imputation equation are given in Table 5. Shop repairs are reported to be more expensive than those that may have been done at home. The large positive constant term and the even larger coefficient for the shop-repair dummy suggest economies of scale in repair. In addition, the coefficient on the square of the number of parts fixed is negative; suggesting economies of scope. The most expensive single repair, on average, is a catalytic converter, followed by a carburetor. On the other hand, common repairs such as adjusting the air-to-fuel mixture, the timing, or the idle speed seem to be relatively cheap.

In order to impute a cost to a round of repair with zero reported costs but repairs listed as having been conducted, we simply plug values for the dependent variables into this equation and calculate the implied cost. We refer to costs that include imputed costs for seemingly false zeroes as "complete" costs. There are two indications that this is a reasonable approach to this particular problem of missing data. First, the R^2 statistic for the cost imputation equation, which is one measure of goodness-of-fit, is .22; this is a respectable fit for a regression performed on cross-sectional data. Second, the mean cost estimates one gets using our imputation technique are broadly similar to the mean non-zero reported costs when the means are calculated for two categories of repair.⁹

Cost statistics from Arizona provide perhaps the best direct estimate of the costs of repair in an on-going I/M program. As such, they provide a useful benchmark against which to evaluate two sets of I/M repair-cost estimates developed elsewhere in the literature. The first and most important is the set of assumptions used by the EPA in the RIA of the Enhanced I/M rule:

The overall average repair cost for transient failures is estimated to be \$120. Average repair costs for pressure and purge test failures are estimated to be \$38 and \$70, respectively. Repairs for NOx failures are estimated to cost

⁸ See Appendix A for a detailed breakdown of the numbers of rounds of repairs that have missing values for these data.

⁹ See Appendix A for the actual costs. The two types of repair are repair of a vehicle that failed the test for at least one of the three pollutants, and repair of a vehicle that seems only to have failed due to tampering.

Table 5. Cost Imputation Equation

Independent Variable	Coefficient	Standard Error
constant	34.61	2.90
2 nd round of repair	4.14	1.85
3 rd round of repair	3.69	3.07
4 th + round of repair	3.22	4.24
vehicle age	-2.19	.22
shop repair	54.96	1.66
(# parts fixed) ²	-1.53	.04
Dummy variables indicating repair performed:		
inlet restrictor	-.46	3.31
gas cap	5.59	2.73
timing	9.42	1.72
air intake system	20.48	2.05
vacuum leaks	19.57	1.78
air/fuel mixture	14.26	1.89
idle speed	10.94	1.92
spark plug wires	23.31	2.15
spark plugs	33.96	1.94
spark plug contacts	29.84	2.29
carburetor	87.81	1.82
oxygen sensor	83.04	2.25
throttle sensor	62.86	3.45
temperature sensor	30.01	4.66
ambient sensor	18.96	5.88
barometric sensor	13.92	6.31
maf sensor	62.78	6.53
rpm sensor	-18.70	8.65
electronic control module	84.58	6.08
egr system	64.27	1.67
electrical problems	74.90	3.17
coolant system	52.81	3.62
positive crankcase ventilation	24.65	2.26
evaporative emissions system	27.43	2.47
air injection system	40.69	2.35
catalytic converter	134.35	2.51

Note: The dependent variable is total repair costs. The R² is .2234, N=44,881.

approximately \$100 per vehicle. Data from the Hammond test program indicate that it would be very rare for one vehicle to need all three of these repair costs. (USEPA 1992 p. 84)¹⁰

Arizona does not include a purge or pressure test as part of Enhanced I/M, though some evaporative system repairs, such as gas cap replacement, are required. Second, the 1994 California Pilot Project in Sacramento, California repaired about 200 vehicles at an average cost of \$215. Here, too, tamper-related repairs were not conducted.

Table 6 summarizes the average costs and emissions reductions associated with Arizona's current program. For each vehicle in the sample, we add up the complete costs of all of its rounds of repairs, and calculate the change in emission rates for each vehicle from its initial to its last observed test. We also derive estimates of the costs (which on average turn out to be negative) associated with repair-induced changes in fuel economy. To that end, we assume that gasoline costs \$1.00 per gallon, and that each vehicle travels a number of miles each year equal to the age-specific annual mileage rates used in EPA's emissions inventory model.¹¹ We also assume that repairs last for two years (the time between required I/M tests in the Arizona program),¹² which implies that fuel economy benefits (as well as emission reductions) persist that long. Thus, the fuel economy costs presented here are the present discounted value of two years' worth of changes; a discount rate of 5 percent is applied to second-year costs. Finally, means of all these quantities are calculated over the 82,786 failing (and 64,403 failing and subsequently repaired) vehicles in 17 months' of test data.

The average cost of repairing vehicles in Arizona seems to be almost exactly the same as the EPA estimate. This confluence, however, is somewhat misleading. While the EPA study, like the California Pilot Project, did not include tampering problems, the data from Arizona include many repairs of vehicles that exceeded no tailpipe cutpoints but failed the test, we presume, because of tampering. As Appendix A makes clear, rounds of repair are much cheaper in the Arizona data if they are aimed solely at tampered parts. Thus, we need to exclude such rounds of repair from our estimation of mean repair costs in order to have a number that is comparable to the EPA estimate.

¹⁰ It is not clear how these estimates were generated. We obtained EPA's repair dataset but were unable to reproduce their results with respect either to costs or emission reductions. Indeed we found that some vehicles were not repaired to the specified cutpoints, but additional repairs were nonetheless projected to achieve compliance. For further details see Harrington, McConnell, and Cannon (1998).

¹¹ The MOBILE Model. These same annual mileage assumptions by vehicle model year are also used to calculate total tons of pollution in the costs and simulation results below.

¹² There is little evidence on the duration of emission repairs. Using a dataset of Arizona vehicles that had returned after two years for the renewal of their I/M certification, Wenzel (1998) found that vehicles requiring repair during the first I/M renewal period were more likely to fail the first emission test during the second period, compared to a vehicle of the same vintage that passed the test during the first period. In other words, the duration of some emission repairs for some, but not all, vehicles is less than two years. Thus an average of two years is not an unreasonable assumption.

Table 6. Average Repair Costs, Fuel Economy Costs, and Emission Reductions for Vehicles Repaired in the Arizona Program 1995-96

Mean per-vehicle values of:	All Failing Vehicles (N=82,786)	Failed Vehicles Repaired to Meet the Cutpoints (N=64,403)
Complete repair costs (\$) ^a	123.02	119.53
Fuel economy costs (\$) ^b	-34.83	-46.16
Total costs (\$) ^c	88.19	73.36
Emission-rate improvements (g/mile)		
HC	0.82	0.98
CO	12.35	14.92
NOx	0.92	1.12

^a Complete repair costs include imputed costs for rounds with repairs reported but costs given as zero. Both non-tampering and tampering repairs are included.

^b The fuel economy costs presented here are the present discounted value of two years' worth of costs.

^c Total costs are the sum of complete repair costs and fuel economy costs.

That exclusion gives us non-tamper-related repair costs per vehicle equal, on average, of about \$199. This is quite a bit higher than the estimate put forth by EPA, especially considering that the "cutpoints" to which the vehicles were being repaired were more lenient in Arizona than in the EPA labs. We note that EPA used only 266 vehicles in its repair study; that may simply have been too small a sample to yield an accurate prediction of the costs that obtain in a working I/M program. Our estimate is, on the other hand, a bit lower than the average cost of repair found in the California Pilot Project. This may be, at least in part, because the cutpoints to which vehicles were to be repaired were substantially tighter in the Pilot Project than in Arizona.¹³

The estimates of emission-rate improvements are much smaller than both the emission reductions obtained by mechanics by in EPA's laboratory studies and the reductions assumed by EPA in the RIA. The vehicles in EPA's repair data set showed average improvements of 1.9 g/mi for HC and 32 g/mi for CO (NOx was not observed in these studies), compared to 0.82 g/mi for HC and 12.35 for CO in Arizona. The differences in average emission reductions arise in part because the cutpoints were set at much more lenient levels in Arizona's program than those used in the EPA labs. EPA's assumption that emission reductions would be larger than we observed in the Arizona would also help explain why EPA's estimates of fuel economy improvements were larger than ours (12.6 percent vs. 3.5 percent). Compared to the Arizona results, in other words, EPA had predicted lower repair costs for a more stringent program.

¹³ See Harrington, McConnell and Cannon (1998), Appendix B for the various cutpoints.

B. Characteristics of Successfully Repaired Vehicles

To estimate total repair expenditures required to bring all failed vehicles in Arizona into compliance with the cutpoints, it is tempting simply to multiply the mean repair costs from Table 6, \$119.53 per vehicle, by the number of failed vehicles. However, the estimates in Table 6 include only those vehicles that were repaired to pass the I/M test, and there is no guarantee that the vehicles we do observe being successfully repaired to pass are just like the ones we do not. If the two groups of cars are qualitatively different from one another, then cost estimates derived for the former group may not be applicable to the latter.

Table 6 provides some hints that the two groups may be qualitatively different. Vehicles we observe passing a re-test have their emission rates reduced more by repair than those that have not attained compliance by the end of our sampling period, yet these passing vehicles seem to have less money spent on their repair. In order to explore the distinctions between the two types of vehicles more carefully, we conduct an empirical exploration of whether observable vehicle characteristics seem to influence the likelihood that a failed vehicle passes the test by the end of our sampling period.

To that end, we estimate a probit equation, in which the dummy dependent variable Z equals 1 if and only if the vehicle passes the test. The probit model posits a latent variable Z^* , which is a score representing the tendency of the vehicle to be repaired successfully. Z^* is specified as a linear combination of the effects of observable characteristics W , plus a disturbance term reflecting the influence of the unobserved variables:

$$Z^* = \gamma W + \mu \quad (1)$$

where μ is distributed standard normal. The variable Z is observed if and only if $Z^* > 0$.

The results from estimation of the probit equation (Table 7) are consistent with the various reasons we might expect some vehicles to have difficulty passing the test. (Note that a positive coefficient for a variable in Table 7 indicates that an increase in the value of the explanatory variable makes the vehicle more likely to pass the test.) If the initial test was too recent, an owner may simply be less likely to have had time to successfully repair and retest the vehicle during the data-collection period. Vehicles that failed the test only because of tampering are easier to diagnose and bring up to code than vehicles that exceed the cutpoint for at least one pollutant.¹⁴ Furthermore, it seems that (at least for HC and NOx) vehicles that fail by a wide margin are more likely to have final observed tests that are failures, either because the repairs are more time-consuming (and not complete by the end of our sampling period), or because the costs of bringing such a vehicle into compliance is high enough to induce the owner to drive illegally, scrap the car, or sell it out of the area. Finally, older cars are more likely to linger without being fixed; this may reflect the fact that older cars are better

¹⁴ The vehicles that did not fail any one of the individual pollutants but which failed the overall test were considered to tampered vehicles. These vehicles are the left out category for the dummy variables on which pollutant caused the vehicle to fail shown in Table 6. Therefore, the coefficients on these variables show the probability of eventually passing relative to tampered vehicles.

candidates for scrappage anyway, and thus are more commonly pushed into the junkyard by impending IM240 repairs.

Table 7. Results from Probit Analysis of Successful Repair^{a,b}

Explanatory Variable	Coefficient	Standard Error	Significance ^c
Date of initial test	-.00010	.000043	*
Light truck	.036	.017	*
Medium-duty truck	.23	.027	*
Fail HC only	-.48	.028	*
Fail CO only	-.26	.035	*
Fail NOx only	-.11	.029	*
Fail HC and CO	-.54	.032	*
Fail CO and NOx	-.29	.11	*
Fail HC and NOx	-.51	.035	*
Fail HC, CO, and NOx	-.63	.056	*
(HC g/m, initial – cutpoint)*(failed HC)	-.12	.0057	*
(CO g/m, initial – cutpoint)*(failed CO)	-.00062	.00035	
(NOx g/m, initial – stand.)*(failed NOx)	-.15	.0073	*
Age at initial test	-.067	.0023	*
Length of initial test (seconds)	-.014	.00011	*
Constant	5.1	.56	*

^aThe dependent variable = 1 if vehicle is observed to be repaired to pass.

^bThere were 82,786 observations, and the log-likelihood value is 25,833.849

^cAsterisk indicates significantly different from zero at the 5% level.

Thus, our sample of successfully repaired vehicles is not a random sub-sample of all the vehicles that failed the Arizona I/M test. If one wants to apply cost estimates from that sub-sample to a broader group of vehicles in need of emission-related repair, then steps need to be taken to correct the estimated means for sample-selection bias.¹⁵

C. Emission Reduction and Cost under Different Cutpoints

An important issue for the future of I/M programs is whether the cutpoints used in the emissions test should be weakened or tightened. Tighter cutpoints increase emission reductions but do so at a cost both in terms of increased repair costs and inconvenience costs associated with multiple repairs. Here we try to shed light on how changing the emission-rate cutpoints in Arizona would have influenced repair-related costs and associated emission-rate reductions, at least for one group of vehicles.

¹⁵ See Greene (1990) p. 740-747 for details of Heckman's well-known two-step estimator for correcting sample-selection bias.

Cars from the 1990 and 1991 model years were manufactured to meet the same engine-certification emission standards, and use similar technologies to accomplish their pollution-control goals (EEA, 1997). However, the cutpoints in Arizona were much stricter for the 1991 model year than for the 1990 model year as Table 8 shows. It is, therefore, not surprising that the failure rate on initial tests is lower for the 1990 cars than the 1991 cars, even though failure rates usually rise as vehicles age (see Table 1 for failure rates by model year).

Table 8. Emission-Rate Cutpoints and Initial-Test Failure Rates for Passenger Cars in Arizona I/M, Model Years 1990 and 1991

Model Year	Cutpoints (grams/mile)			Number of Failures per 100 Initial Tests
	HC	CO	NO _x	
1990	2.0	30	3.0	5.55
1991	1.2	20	2.5	6.82
Ratio of 1991 to 1990 values	.60	.67	.83	1.23

We examine the importance of cutpoints by comparing the actual emission reductions and costs for 1991 vehicles with a simple simulation of what the results would have been if the vehicles had been subject to 1990 cutpoints. In this simulation we assume the vehicle is only repaired if it has emissions exceeding the 1990 cutpoints. This analysis is performed only on the subset of 1991 cars that initially failed the 1991 cutpoints for at least one of the tailpipe pollutants.¹⁶

Table 9 shows the results of this analysis. The looser 1990 cutpoints mean that fewer vehicles will fail and get repaired: 1,092, compared to 1,872 under the tighter cutpoints. Repair costs and fuel economy benefits combined are about 60 percent higher when the tighter cutpoints are applied. For these vehicles and this range of standards, the tighter cutpoints seem to generate relatively large increases in compliance costs compared to emissions reductions. Costs of compliance are about 60 percent higher under the tighter cutpoints while emission reductions of all three pollutants increase by about half of that percentage. These results fit with expectations that the costs of reducing emissions will rise quickly as I/M programs try to attain marginal improvements in emissions with stricter cutpoints. This analysis is only suggestive because it deals with just one model year and simulated results instead of actual cutpoint changes (the 1991 model year vehicles were only repaired to one set of cutpoints and we do not know if the same repairs would have been made if the cutpoints were different). As I/M programs in the future begin to tighten standards to which vehicles must comply, it will be important to assess the costs and effectiveness of such changes.

¹⁶ We exclude all of the vehicles that were shown as failing but do not have emissions that exceed any of the cutpoints. We also exclude trucks from this analysis.

Table 9. How More Stringent Standards Affect Costs and Emission Reductions

Cutpoints Imposed	No. of vehicles repaired	Total Costs (\$1000)			Emission Reductions (tonnes over two years) ^a		
		Repair	Fuel Economy ^a	Repair & Fuel Economy	HC	CO	NOx
1991 Cutpoints	1872	295	-57	238	29.43	421.8	38.82
1990 Cutpoints	1092	185	-39	146	20.61	325.9	27.84
Percent change associated with tightening the cutpoint	71%	60%	46%	63%	43%	29%	39%

^a We assume that repairs and the associated fuel economy benefits last two years, and that the discount rate is 5 percent. Thus, reported reductions are $1.95 \times$ one-year's-worth of emission reductions. The second year of fuel economy benefits is discounted as well.

D. Cost-Effective Repair

Table 3 showed great variation in the emission-rate and fuel-economy changes induced by vehicle repair. As Table 10 shows, no matter whether raw or complete repair-cost data are considered, there is tremendous heterogeneity in the amount of money motorists spend trying to repair their vehicles to pass the I/M test. In addition, repair expenditures are only very weakly correlated with improvements in emission rates and fuel economy. These features of the data raise the possibility that some repairs are simply more cost-effective than others.

Table 11 provides an example of one dimension along which cost-effectiveness seems to vary in our data. Regardless of whether one looks at reductions in HC, CO, NOx, or a weighted sum of the three pollutants, emission reductions are cheaper per tonne for light trucks than for cars, and repairs are most cost-effective for the heavier class of trucks. Almost 43 percent of the emission reductions come from light-truck repair, even though light-truck owners incur only about 27 percent of all repair expenditures. It would appear from these results that future attempts to further reduce vehicle emissions could most cost-effectively come from tightening light truck cutpoints.

Table 10. Summary Statistics on Repair Costs

Statistic		Complete repair costs ^{a,b}	Raw repair costs ^{a,c}
Summary statistics	Mean	123.02	75.19
	Standard Deviation	161.60	147.28
	Minimum	0.00	0.00
	Maximum	3708.00	3609.00
Correlation coefficients of costs with improvements in:	Δ HC (g/m)	.14	.11
	Δ CO (g/m)	.12	.09
	Δ NOx (g/m)	.10	.07
	Δ MPG	.03	.03

Note: N = 82,786.

^a Costs are summed across all of each vehicle's rounds of repair.

^b Complete repair costs include imputed costs for rounds with repairs reported but costs given as zero.

^c Raw repair costs are strictly as reported.


Table 11. Costs, Pollution Reduction, and Cost-effectiveness of Repair by Vehicle Type

	Cars	Light trucks 1	Light trucks 2
Number of vehicles	57,559	18,691	6,536
Mean repair costs ^a	129	110	109
Tonnes weighted emissions ^b reduced	338	169	85
Mean cost-effectiveness (\$/tonne)			
HC	21,946	12,156	8,403
CO	1,334	953	671
NOx	17,791	10,902	8,892
Weighted emissions ^b	3,831	2,401	1,821

^a Costs include imputed costs for rounds with repairs reported but costs given as zero.

^b Weighted emissions are a weighted sum of tonnes of HC, CO, and NOx given by:
Weighted emissions = HC + .1CO + 2.5 NOx.

Figure 1 represents an effort to quantify more completely the importance of paying attention to variation in cost-effectiveness of repairs. We first rank the repairs that actually occurred in the Arizona I/M program according to their cost-effectiveness. We then construct the graphs in Figure 1 by assuming that repairs are performed in decreasing order of cost-effectiveness. We then track the cumulative total costs and emission reductions that occur as a result of the repair as those repairs get less and less cost-effective. Emission reductions, measured along the horizontal axis are measured as a weighted average of the annual reductions in tonnes of HC, CO and NOx. The weights are taken from the literature on the relative damages from the three pollutants (Small and Kazimi, 1995); other weights yield very similar results. In the top line, the monetary values of improvements in fuel economy associated with repairs are not included in the analysis; in the lower line, those values are included in total costs.

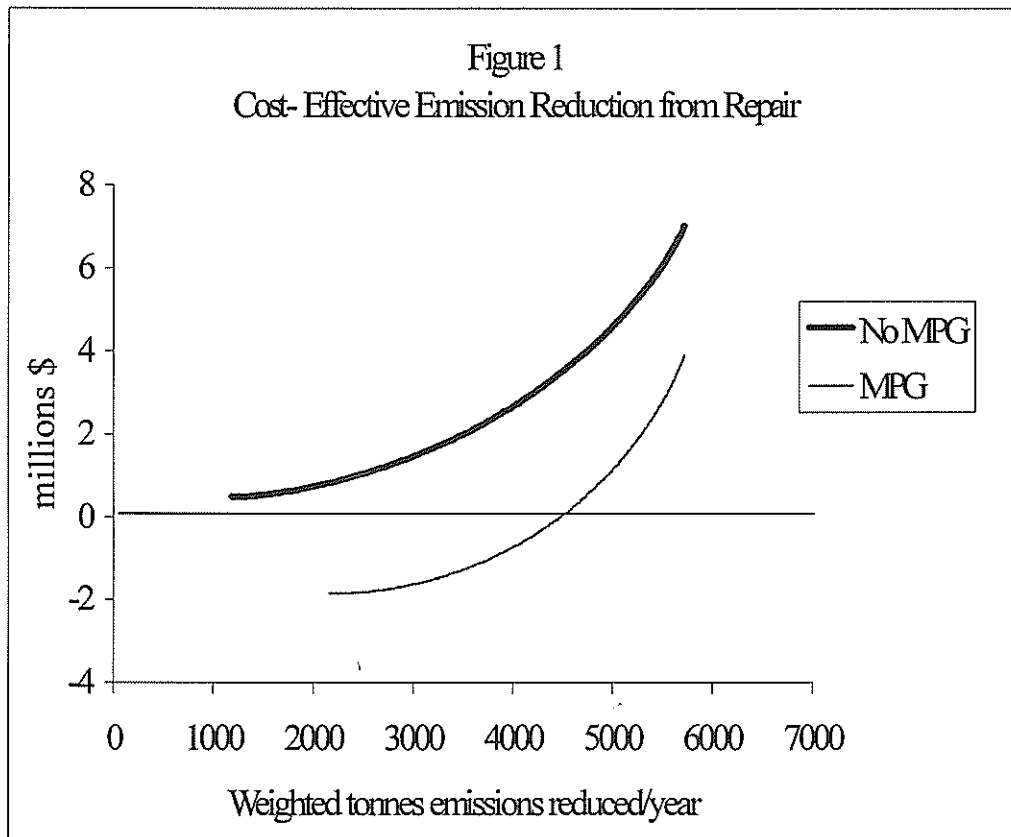

The far right end of both lines shows the total costs and total amount of emission reductions that occurred during the 1995 to early 1996 period as a result of repair in the Arizona I/M program. The rest of each line shows costs and emission reductions if only the most cost-effective repairs were done to achieve a given level of emissions reductions. The figure makes clear that a large share of the emission reductions from the I/M program could potentially be achieved at a relatively small fraction of the cost. For example, if fuel economy benefits are not accounted for (the top line in Figure 1), about 5,000 weighted tons of reduction can be achieved for approximately 4.6 million dollars. This is roughly 87 percent of the emissions reductions under the current program at 65 percent of the cost. The implication is that I/M policy could profitably be redesigned to promote cost-effective repairs and avoid mandating the completion of repairs that accomplish relatively little emission reduction per dollar spent. How this can be done in practice will be a challenge for policy-makers. Simply changing cutpoints in the test is unlikely to have much impact on cost-effectiveness of repairs. Some type of fee on the emissions rate of each car would have the desired result if repair technicians are relatively good at predicting emission reductions from repair and the associated costs. When confronted with paying a fee or getting the vehicle repaired, motorists will undertake repairs only when the expected costs of repair are less than the fee; this will ensure that only cost-effective repairs are made. There are technical and political barriers to fees, however, which must be overcome before they can be used extensively for reducing emissions from motor vehicles (Ando, Harrington and McConnell, 1998).

IV. CONCLUSIONS

We have examined the cost and effectiveness of emission repair in the Arizona Enhanced I/M program. We find that the average cost of repairs is \$123 per repaired vehicle. When we exclude vehicles for which any tamper-related repairs are done, however, we find an average repair cost of \$199. On the basis of comparative before-and-after emission tests, the average emission reduction resulting from these repairs is 0.82 g/mi for HC, 12.35 g/mi for CO and 0.92 g/mi for NOx. When these emission reductions are averaged over the entire fleet, they amount to a 14 percent emission rate reduction for HC and CO and an 8 percent emission reduction for NOx. These emission reductions are somewhat smaller than EPA's original estimates, and the costs are somewhat higher. The cutpoints used in Arizona were much less stringent than those used in the EPA estimate, so the discrepancy in emission reductions is smaller than it looks, but the discrepancy in costs is larger.

The average cost and emission reductions tell only a part of the story for several reasons. First, there are large differences in repair costs across individual vehicles. Costs for individual cars range from large negative numbers (the fuel economy benefits more than outweigh the costs of repair) to positive net costs of over \$400. The higher cost repairs are more likely to fall on low income vehicle owners whose vehicles tend to have higher failure rates.

Second, we find that a surprisingly large fraction of the vehicles in our sample--about 22 percent of those failing their initial test--do not show a passing test record. These vehicles may be sold outside the region, or scrapped, or some may still be in the process of completing

the I/M cycle. However, there are some vehicles that go through a number of rounds of repair without passing the test, indicating that repairing to pass may be difficult for some vehicles. In our statistical analysis we find that non-passing vehicles are more likely to be cars than trucks (cars face tighter cutpoints than trucks), to be older, and to fail the test for multiple pollutants. This analysis provides more evidence that at least some vehicles may be difficult to repair and that is why they are not passing the I/M test. More work needs to be done to track the non-passing vehicles to determine their impact on I/M effectiveness.

Our results all suggest that it is critical to consider costs and cost-effectiveness in designing I/M policy. Because there is great variation in costs and effectiveness of repair across vehicles, costs could be reduced if there were better targeting of which vehicles get tested and which repaired. Clearly, relatively new vehicles are less likely to fail so they should be tested less frequently, and older vehicles which are more likely to fail can be tested more frequently. California's high-emitter profiling policy attempts to do exactly that--to target those vehicles for more frequent testing that are most likely to have high emissions. On the other hand, uniform policies such as those that tighten cutpoints across the board are unlikely to be cost-effective, both because of the differential impact on vehicles and because there is evidence that average costs rise more than in proportion to emissions reductions with stricter I/M cutpoints.

Finally, we find encouraging evidence that some of the data problems inherent in collecting repair cost estimates in an on-going I/M program may be manageable. We provide a way of statistically estimating repair costs when costs are not reported but the repairs performed are known. The costs estimated using our method are consistent with the evidence we do have of reported repair costs. Information about the costs of repair are critical for assessing cost-effective improvements to I/M programs and for exploring more cost-effective alternative ways of reducing vehicle emissions.

APPENDIX A.

Average Costs by Round of Repair

This table shows the mean costs, both reported and complete, for different types of repair rounds. Each round of repair in that data is categorized in three ways. The vehicle failed the previous test for at least one of the three major tailpipe pollutants, or did not; some parts were reported as having been repaired, or none were; and non-zero repair costs were reported, or not. The rounds of repair for which the second column in Table 6 is zero are of vehicles which fail the I/M test even though none of the pollutant rates exceed the cutpoints. We assume these failures are due to tampering.

Vehicle fails tailpipe test (no=0, yes=1)	Non-zero repair costs reported (no=0, yes=1)	Specific repairs reported (no=0, yes=1)	# of Rounds	Mean reported costs (no imputed costs)	Mean complete costs (using imputed costs for reported costs of \$0)
0	0	0	5,543	\$0	\$0
		1	5,952	\$0	\$48
	1	0	13	\$43	\$43
		1	5,703	\$38	\$38
1	0	0	25,479	\$0	\$0
		1	27,977	\$0	\$131
	1	0	739	\$109	\$109
		1	39,178	\$151	\$151

APPENDIX B.**Arizona Inspection and Maintenance Program Cutpoints
(grams per mile)**

	HC	CO	NO _x
LDV, 1981-82	2.0	60.0	3.0
LDV, 1983-90	2.0	30.0	3.0
LDV, 1991+	1.2	20.0	2.5
LDT1 and LDT2, 1979-83	7.5	100.0	7.0
LDT1 and LDT2, 1984-87	3.2	80.0	7.0
LDT1 and LDT2, 1988-90	3.2	80.0	3.5
LDT1 and LDT2, 1991+	2.4	60.0	3.0

BIBLIOGRAPHY

- Ando, Amy W., Winston Harrington and Virginia McConnell. 1998. *Estimating Full IM240 Emissions from Partial Test Results: Evidence from Arizona*, Discussion Paper No.98-24, Resources for the Future, Washington, D.C.
- California I/M Review Committee. 1994. *Evaluation of the California Smog Check Program and Recommendations for Program Improvements*, Fourth Annual Report to the Legislature, February 16.
- Cebula, Francis J. 1994. *Report on the Sunoco Emissions Systems Repair Program*, Sun Oil Company, Philadelphia, Pennsylvania.
- Energy and Environmental Analysis, Inc. (EEA). 1997. "Emission Control Technology Distribution, Final Report," prepared for E. H. Pechan & Associates, Inc, for submittal to U.S. Environmental Protection Agency, Office of Mobile Sources, Arlington, Virginia, February 10.
- Greene, William H. 1990. *Econometric Analysis* (New York, N.Y.: Macmillan).
- Harrington, Winston, Virginia McConnell, and Anna Alberini. 1998. "Economic Incentive Policies under Uncertainty: The Case of Vehicle Emission Fees," in Roberto Roson and Kenneth A. Small, eds., *Environment and Transport in Economic Modeling* (Dordrecht, The Netherlands, Kluwer Academic Publishers).
- Harrington, Winston, Virginia McConnell, and Amy Ando. 1999. "The Cost of Compliance with the Mobile Source Provisions of the 1990 Clean Air Act." Unpublished paper.
- Harrington, Winston, Virginia McConnell, and Matt Cannon. 1998. *A Behavioral Analysis of EPA's MOBILE Emission Factor Model*, Discussion Paper 98-47, Resources for the Future, Washington, D.C. (September).
- Jaffe, Adam, and Robert Stavins. 1994. *Market Barriers, Market Failures, and the Energy Efficiency Gap*, Discussion Paper 94-30, Resources for the Future, Washington, D.C. (April).
- Lodder, Tymon, and Kim Bruce Livo. 1994. *Review and Analysis of the TOTAL Clean Cars Program*, Regional Air Quality Council and the Colorado Department of Public Health and Environment, Denver, Colorado (December).
- National Research Council. 1991. *Rethinking the Ozone Problem in Urban and Regional Air Pollution*, Committee on Tropospheric Ozone Formation and Measurement, National Academy Press, Washington, D.C.
- Sierra Research Inc. 1994. *The Cost-effectiveness of further regulating mobile source emissions*, prepared for the American Automobile Manufacturers Association, Sacramento, California.
- Small, Kenneth A., and Camilla Kazimi. 1995. "On the Costs of Air Pollution from Motor Vehicles," *Journal of Transport Economics and Policy*, vol. 29, no. 1 (January).
- U.S. Environmental Protection Agency. 1992. *I/M Costs, Benefits and Impacts*, Air Office, November.
- Wenzel, Tom. 1998. "Evaluation of Arizona's Enhanced I/M Program." Presented at the 14th Annual Mobile Sources/Clean Air Conference, Breckenridge, Colorado (September).